


AX-LS-MFS10

Liquid Level Switches -Side mount - External

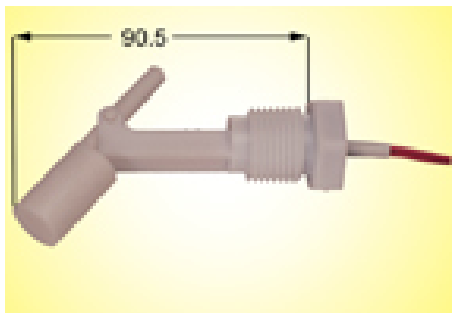

Product Overview

The AX-LS-MFS10 is a low cost side entry external fitting level switch suitable for water level control applications. As the liquid level changes, the float arm follows the surface level and the reed switch activates. The unit can operate in a wide range of liquids.

Features

- Easy Installation
- N/O or N/C Contact
- All Nylon or all Polypropylene Float & Body
- Standard 300mm cable length
- External Fitting as standard (internal option)
- Suitable for a wide range of liquids

Product Specifications

Standard cable length:	300mm
Fitting:	1/2" BSPT thread (1/2" NPT)
Contact Ratings:	50VAAC or DC
Dielectric Strength:	600VDC (min)
Max Switching Current:	0.5A AC or DC
Contact Resistance:	150mOhms
Max Switching Volts:	300VAC/DC
Insulation Resistance:	10mOhms (min)
Materials:	MFS10-N1-2 Polypropylene (washer NBR) MFS10-N2-2 Nylon 6 (washer EPT)
Max Pressure:	Atmospheric
Specific Gravity:	0.7
Temperature Range:	MFS10-N1-2 -10 to + 80 deg C MFS10-N2-2 -10 to + 110 deg C
Colour:	MFS10-N1-2 White MFS10-N2-2 Black
Country of Origin:	U.K.

Order Codes:

AX-LS-MFS10-N1-2
AX-LS-MFS10-N2-2

External Polypropylene Float Switch - Side Level Entry
External Nylon Float Switch - Side Level Entry

